
INSTALLATION GUIDE

Wireless rear camera

Trailer-mounted camera that sends video wirelessly to a receiver in the cab.

Connection diagram

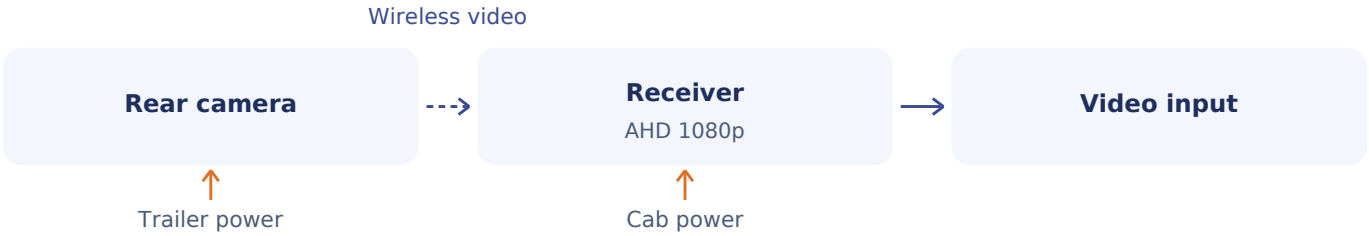

System diagram. Obtain the model-specific wiring and connector diagrams from JaxiCloud Support before connecting the equipment.

Installation

- Fit the camera high on the fixed rear frame of the trailer. Keep the doors, lights and any tail lift clear. Aim the lens behind the trailer and secure the receiver and antenna where the signal is stable with the trailer coupled.
- The camera and receiver each require power. Before connecting the receiver, the workshop must confirm its voltage range and the correct harness for the supplied unit. Use a supply that is active when the camera is needed.

Configuration and functional test

- Follow the pairing procedure for the supplied kit. If it calls for simultaneous start-up, start both units using the verified power arrangement. Confirm that the picture comes from the correct trailer.
- Adjust the angle and check image orientation. Test reconnection after a restart and after uncoupling and recoupling. Test each agreed tractor and trailer combination. The receiver's AHD 1080p output requires a compatible input.

JaxiCloud Support